



Devices heights:

with feet 7 mm (Standard):
Height 750 + 7 = 757

with feet 40 mm (Supplied):
Height 750 + 46 = 796

Adjustable feet 70 mm (Option):
Height 750 + 71 = 821 (to 831)

Adjustable feet 100 mm (Option):
Height 750 + 100 = 850 (to 860)

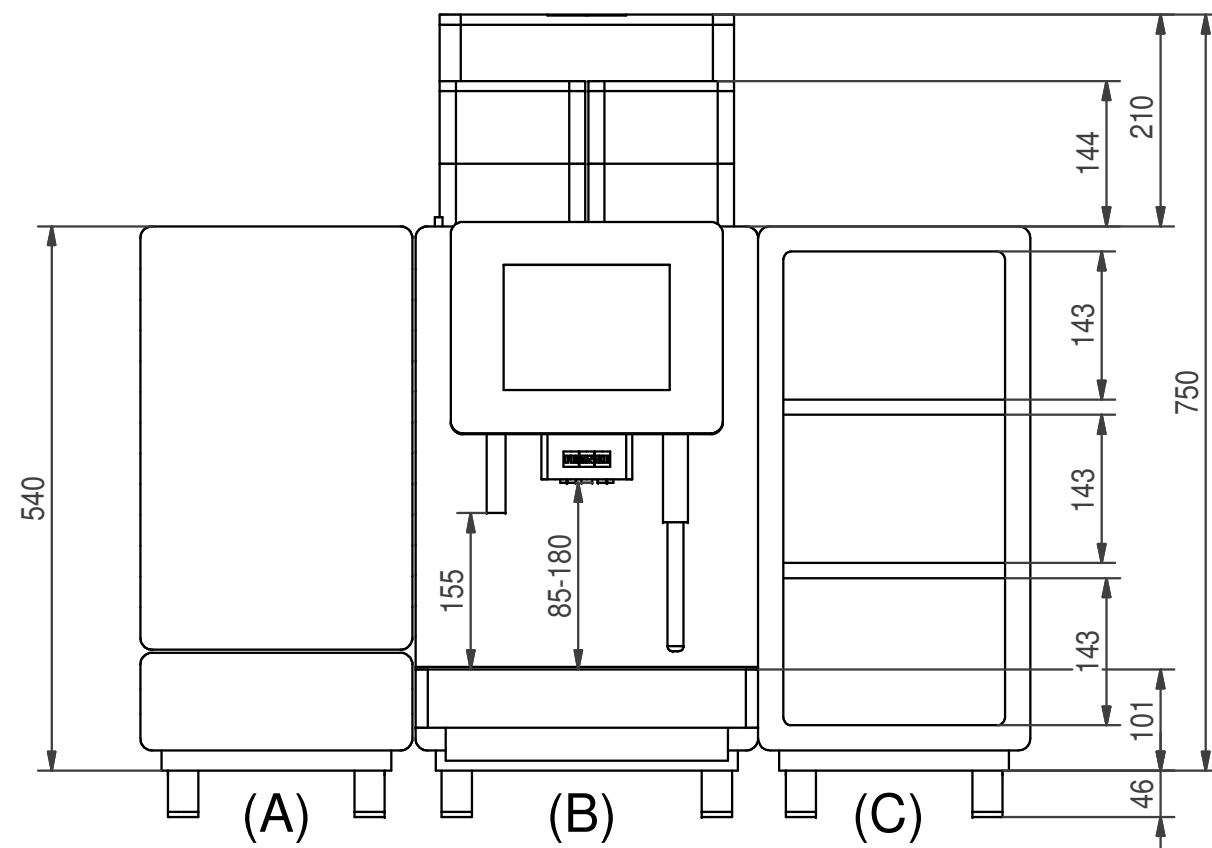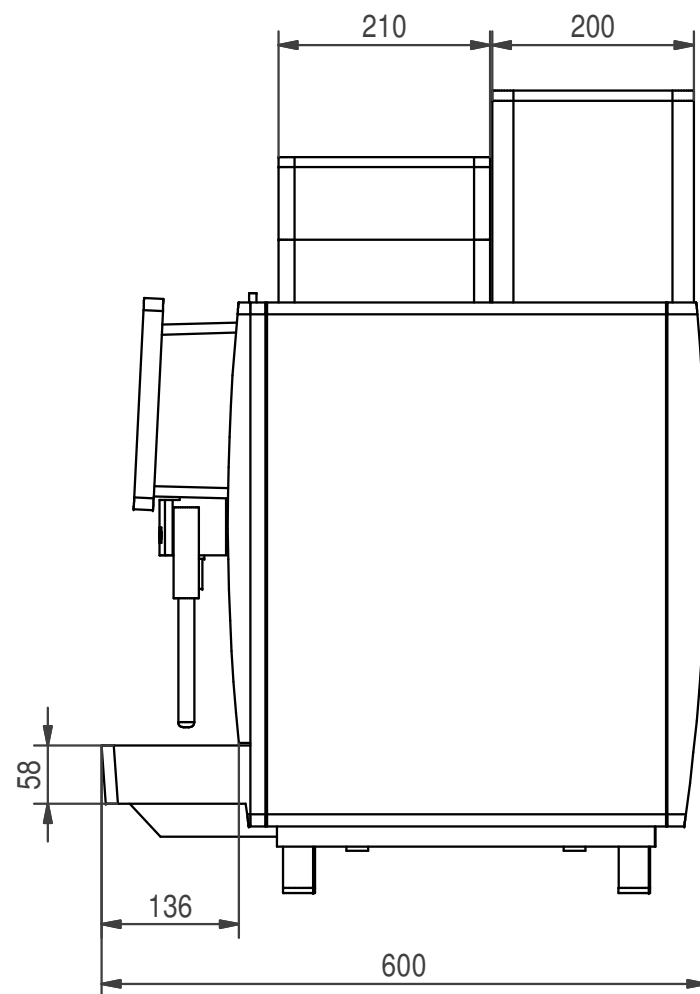

Technical data:


- (A) Refrigerator SU05 EC: 220-240 VAC, 1L N PE, 0,72A, 50-60 Hz - CH/EU/GB
(Net weight max. 18 kg) 110-127 VAC, 1L N PE, 1,50A, 60 Hz - USA
100 VAC, 1L N PE, 1,65A, 50-60 Hz - JP
220 VAC, 1L N PE, 0,72A, 50 Hz - CN
- (B) Franke A600: 220-240 VAC, 1L N PE, 2400-2800 W, 50-60 Hz, 16 A - EU
(Net weight 38 kg) 220-240 VAC, 1L N PE, 2100-2300 W, 50 Hz, 10 A - CH/GB/EU
200-220 VAC, 2L PE, 4500-5300 W, 60 Hz, 30 A - USA
200 VAC, 2L PE, 2300 W, 50-60 Hz, 16 A - JP
220 VAC, 1L N PE, 2600 W, 50 Hz, 16 A - CN

Fixed water connection: Inlet hose 8 x 1500 mm, union nut G3/8"
Waste water hose 16 x 2000 mm

Option:

Built-in water tank: 4,0 liters, level monitoring
with filter cartridge Claris
Drip tray 3,0 liters for waste water, level monitoring

- (C) Cup warmer CW: 220-240 VAC, 1L N PE, 110-130 W, 50-60 Hz - CH/EU/GB
(Net weight max. 16 kg) 110-127 VAC, 1L N PE, 80-130 W, 50-60 Hz - USA
100 VAC, 1L N PE, 80 W, 50-60 Hz - JP
220 VAC, 1L N PE, 110 W, 50-60 Hz - CN

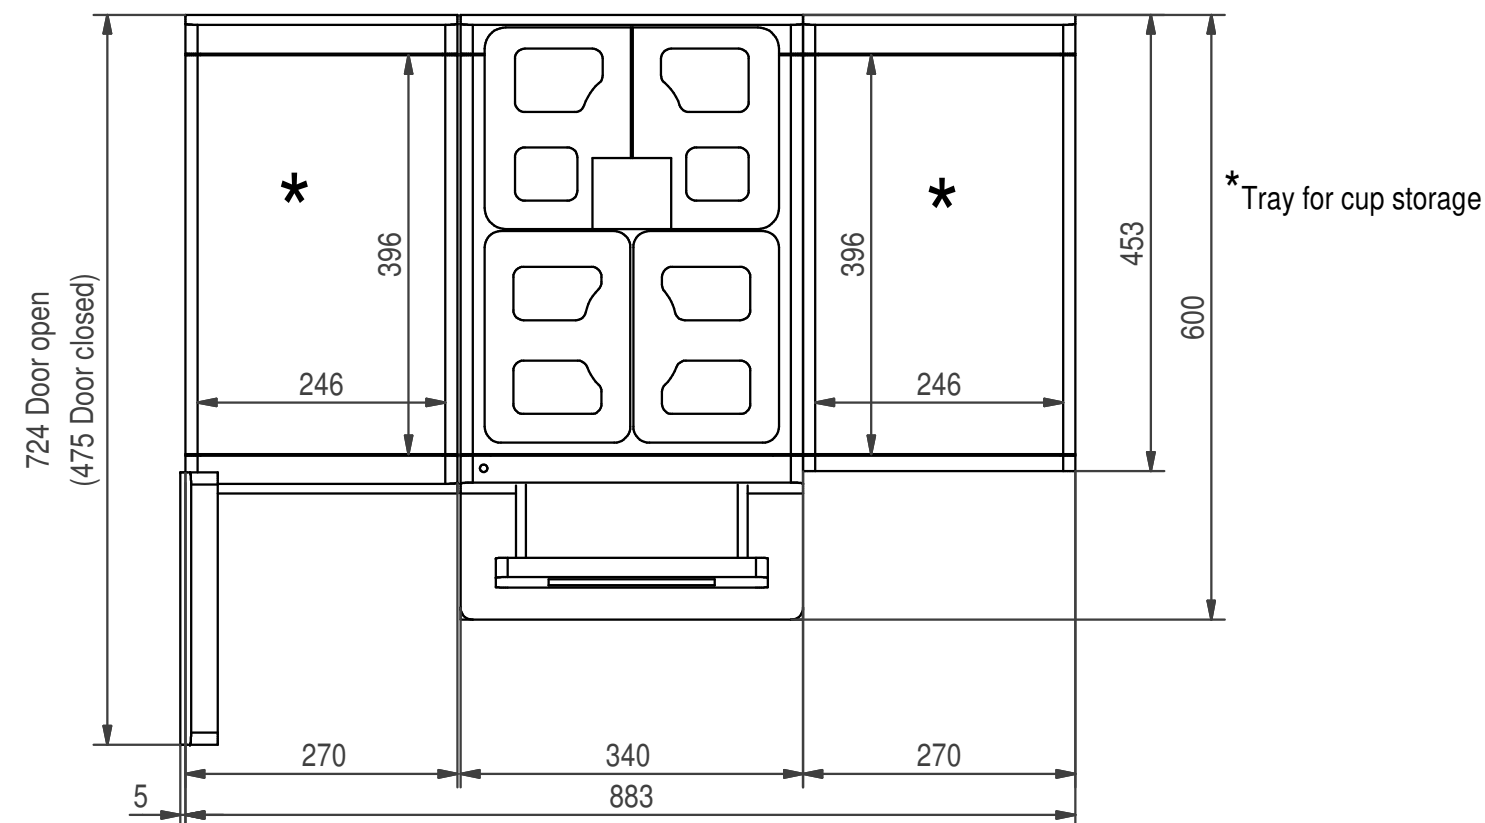

FRANKE Franke Kaffeemaschinen AG Franke-Strasse 9 CH-4663 Aarburg Telefon: +41 62 787 3607 E-Mail: kmch@franke.com Internet: www.franke.com	Unit		Scale	Description TD A600MSEC + SU05 EC + CW - en					
	Drawn	MAIER	21.04.2016						
	Modified	MB002	28.06.2018						
	Checked								
These drawings and specifications are the property of Franke Technology and Trademark Ltd. and shall not be reproduced, copied or transferred to any third party without the prior written permission of Franke Technology and Trademark Ltd., Hergiswil, Switzerland	ECN	500000001512		Document ID - Version		Revision	Status	Sheet / Sheets	Format
	Article Number			20095428-02			15	1 / 2	A3

Installation notes on site:

WW1: Option waste water - DN50 funnel trap ventilated - A600 (B)
for drainage hose

FW1: Option fixed water connection G3/8A external thread - A600 (B)
Check valve, filter and aquastop - recommendation
Water pressure 80-800 kPa (0,8-8,0 bar)
Flow rate: >0,1l/sec. - Water temperatur <25°C
Water hardness: 4-8°dH; 7-14fH; 70-140ppm (mg/l)
Carbon hardness: 3-6°dH; 50-105ppm (mg/l) - pH-value: 6,5-7,5
Chlorine content: <0,5mg/l - Chloride content: <30mg/l
Elektrical conductivity: 50-200µs/cm - Iron content: <0,3mg/l




E1: Soket with RCD (residual current device) - SU05 (A)
220-240 VAC, 1L N PE, 0,72Å, 50-60 HZ - CH/EU/GB
110-127 VAC, 1L N PE, 1,50Å, 60 HZ - USA
100 VAC, 1L N PE, 1,65Å, 50-60 HZ - JP
220 VAC, 1L N PE, 0,72Å, 50 HZ - CN

E2: Soket with RCD (residual current device) - A600 (B)
220-240 VAC, 1L N PE, 2400-2800 W, 50-60 HZ, 16 Å - EU
220-240 VAC, 1L N PE, 2100-2300 W, 50 HZ, 10 Å - CH/GB/EU
200-220 VAC, 2L PE, 4500-5300 W, 60 HZ, 30 Å - USA
200 VAC, 2L PE, 2300 W, 50-60 HZ, 16 Å - JP
220 VAC, 1L N PE, 2600 W, 50 HZ, 16 Å - CN

E3: Soket with RCD (residual current device) - CW270 (C)
220-240 VAC, 1L N PE, 110-130 W, 50-60 HZ - CH/EU/GB
110-127 VAC, 1L N PE, 80-130 W, 50-60 HZ - USA
100 VAC, 1L N PE, 80 W, 50-60 HZ - JP
220 VAC, 1L N PE, 110 W, 50-60 HZ - CN


CC1: Option container for coffee-grounds ejection - A600 (B)

WF1: Option water filter - A600 (B)

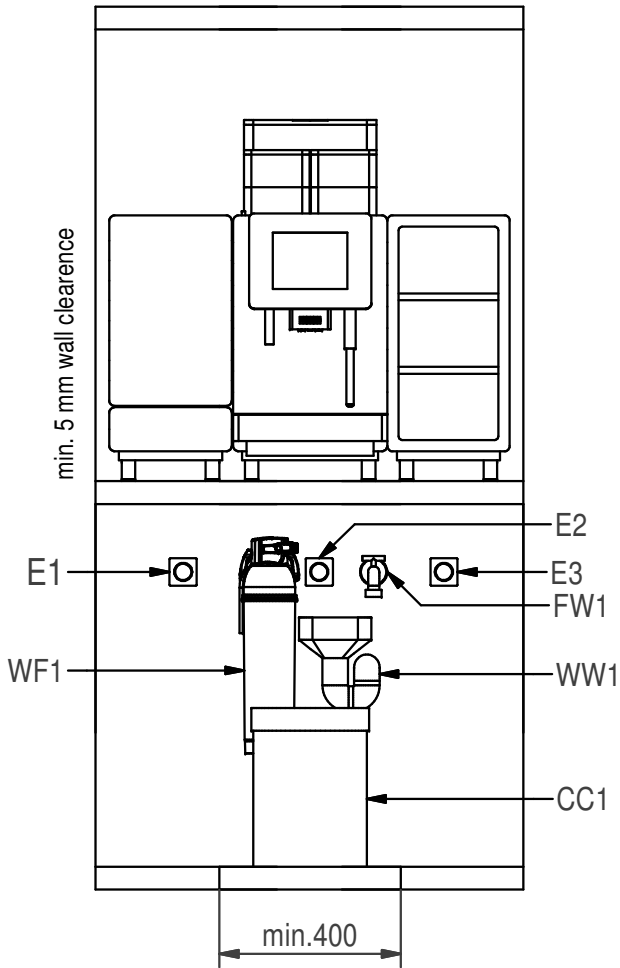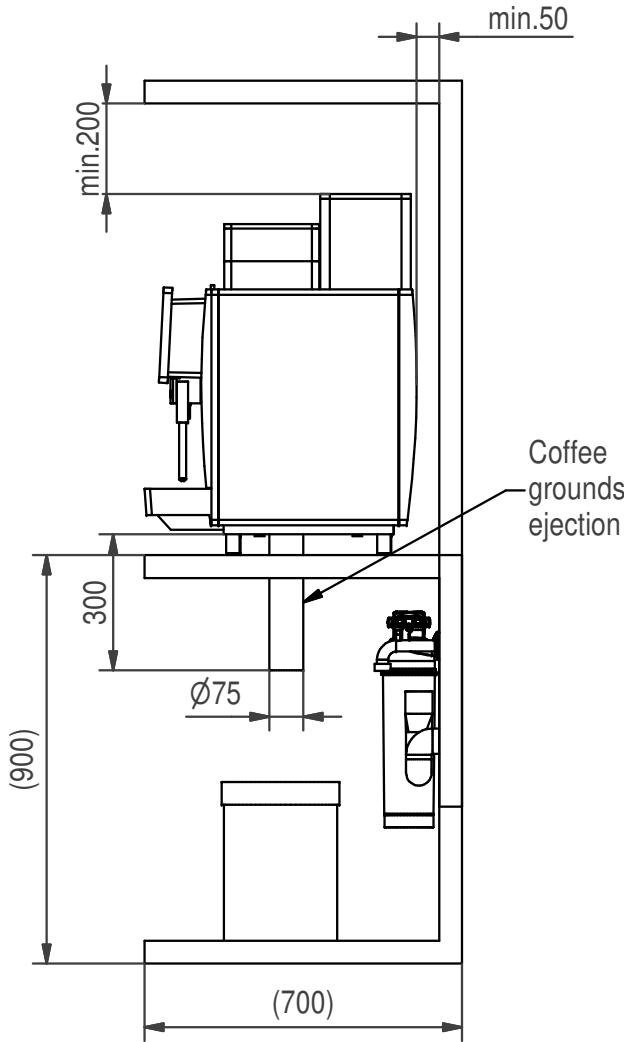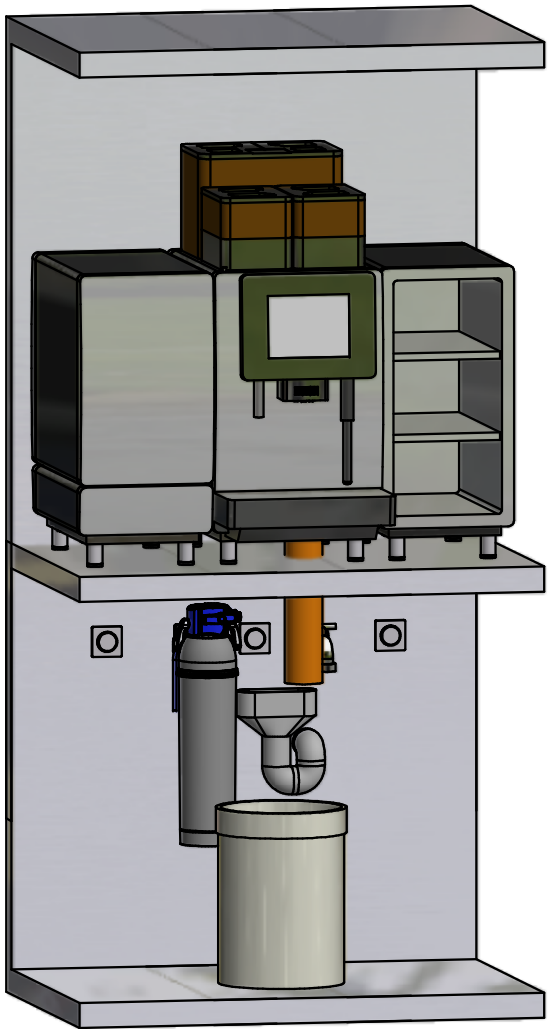

Positions:

- Pos. 1) 1x Drilling
- Supply lines - A600 (B)
 - Supply lines - SU05 (A)
 - Supply lines - CW (C)
- Pos. 2) 1x Drilling (Option)
- Coffee-grounds ejection - A600 (B)
- Pos. 3) 12x Surface
- Equipment feet

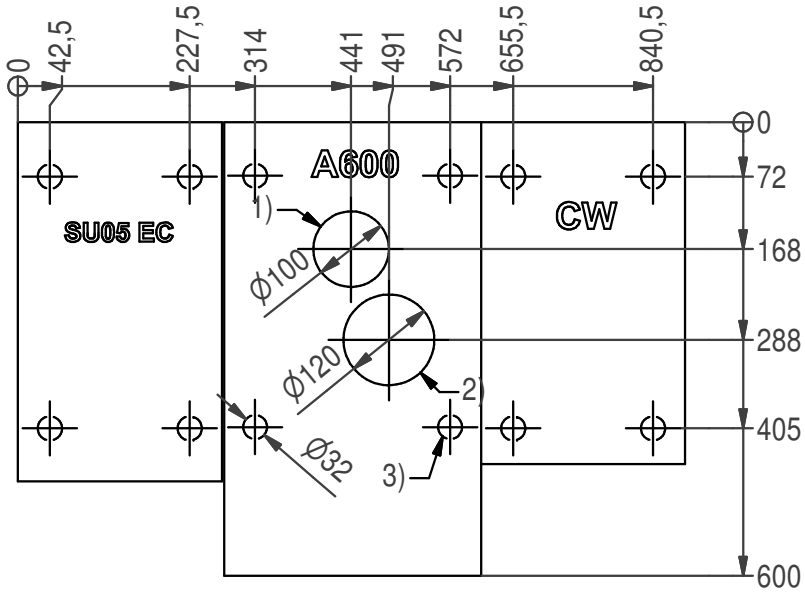

Installation requirements:

Our delivered appliances are ready for operation.
They have to be installed on a flat surface. First
the preparations for the connections of water and
electricity must be complete. Distance max. 1 m up
to the device. This preparation-works must be
performed by qualified specialists in accordance
with applicable regulations. The coffee machine is
intended exclusively for operation in interior
rooms. Ambient temperatur: 5°C - 32°C.
Humidity: max. 80%

FRANKE Franke Kaffeemaschinen AG Franke-Strasse 9 CH-4663 Aarburg Telefon: +41 62 787 3607 E-Mail: kmch@franke.com Internet: www.franke.com These drawings and specifications are the property of Franke Technology and Trademark Ltd. and shall not be reproduced, copied or transferred to any third party without the prior written permission of Franke Technology and Trademark Ltd., Hergiswil, Switzerland	Unit		Scale	Description TD A600MSEC + SU05 EC + CW - en					
	Drawn	MAIER	21.04.2016						
	Modified	MB002	28.06.2018						
	Checked								
	ECN	500000001512		Document ID - Version		Revision	Status	Sheet / Sheets	Format
	Article Number			20095428-02			15	2 / 2	A3